

2/6

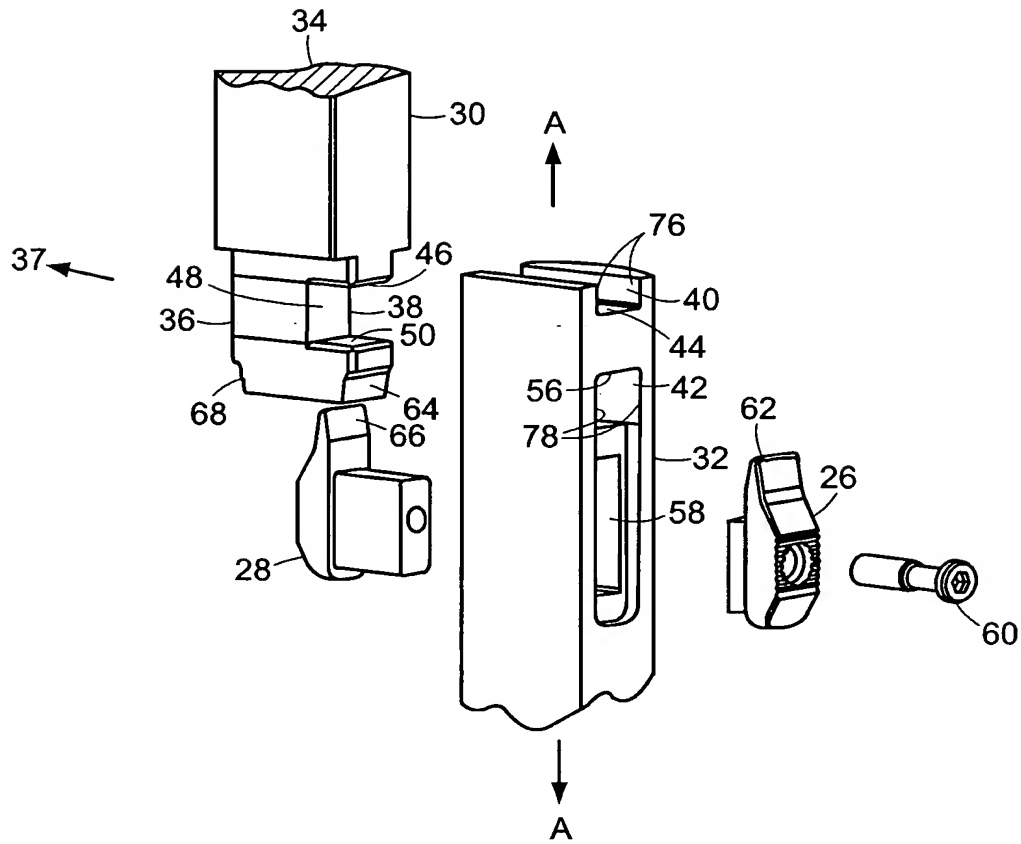


FIG. 2

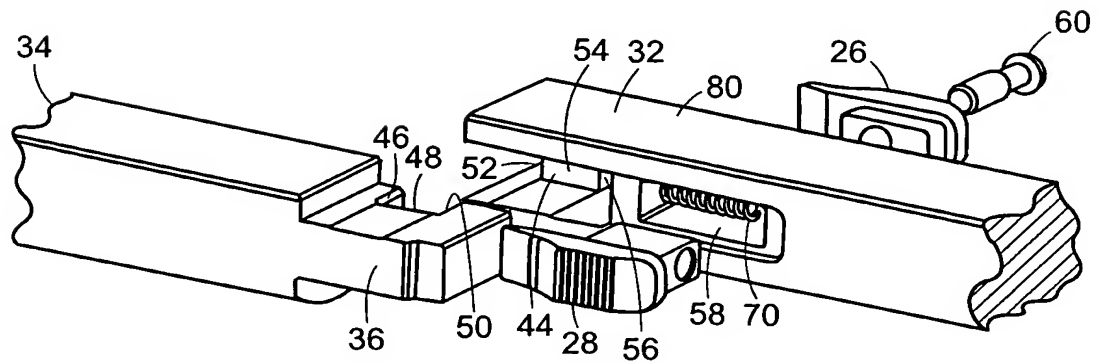


FIG. 3




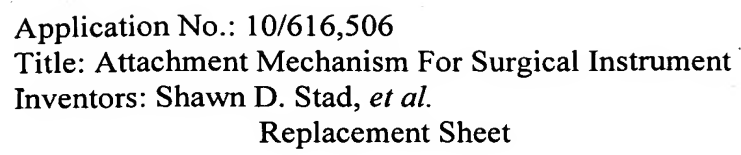


Fig. 1 is a cross-sectional view of a first embodiment of the device. It shows a main body 30 with a top flange 34. Inside the body, there is a component 44, a spring 26, a piston 28, a seal 60, and a threaded rod 70. The rod 70 is secured by a nut 71 and a lock washer 72.

FIG. 5

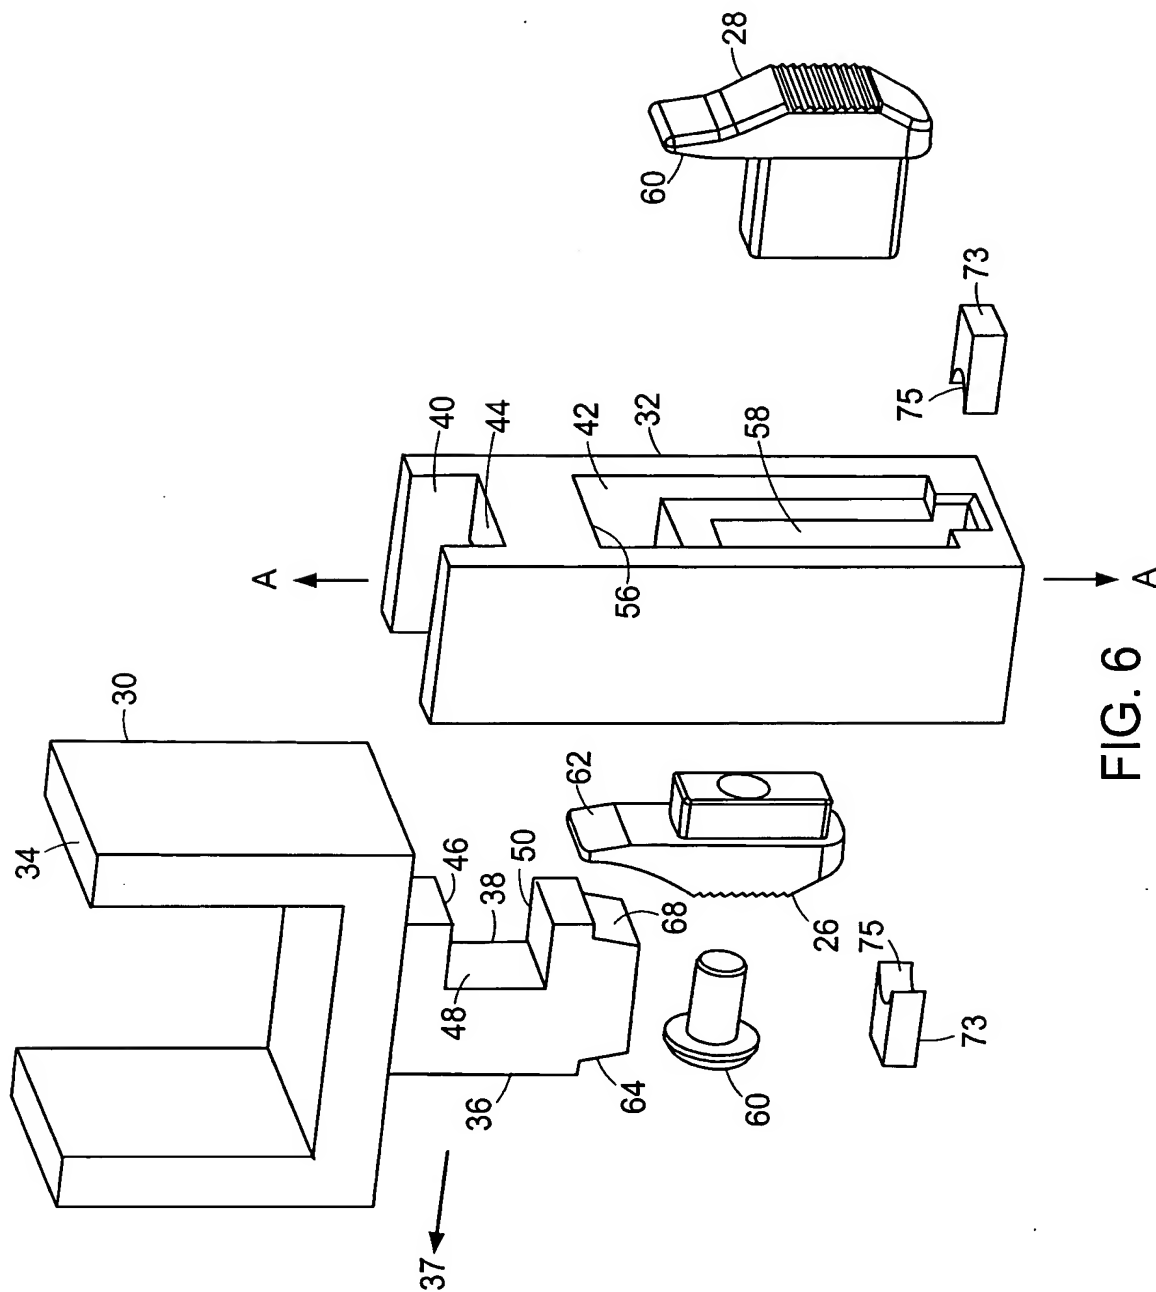



5/6

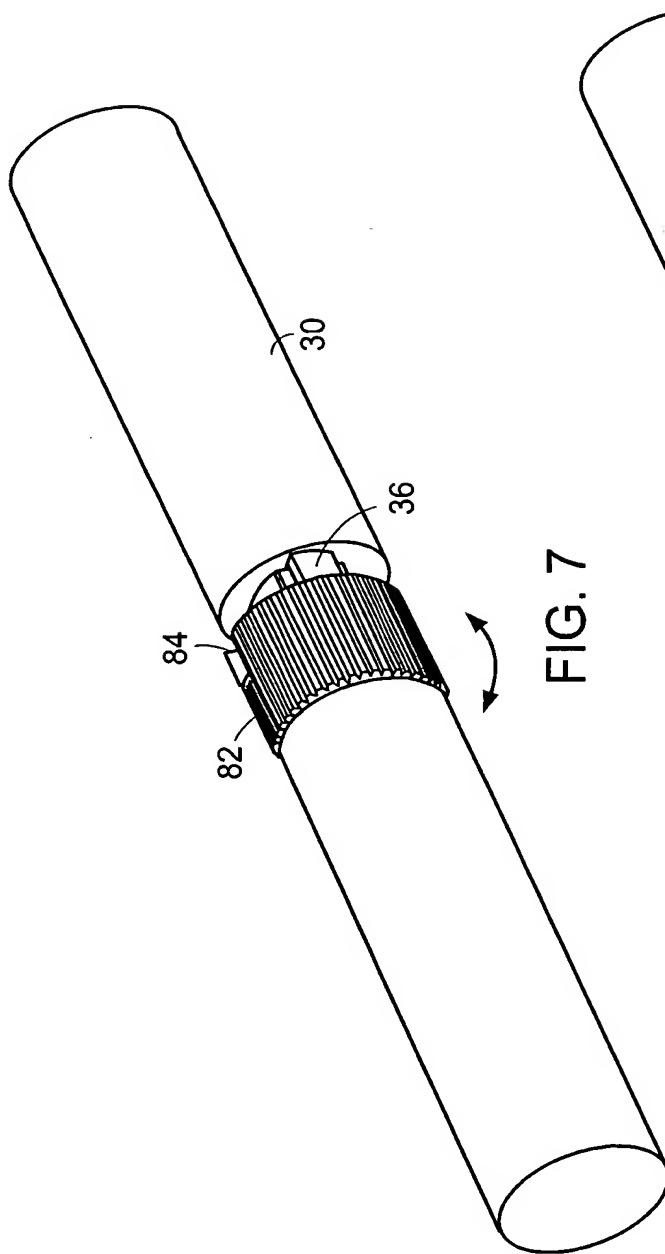


FIG. 7


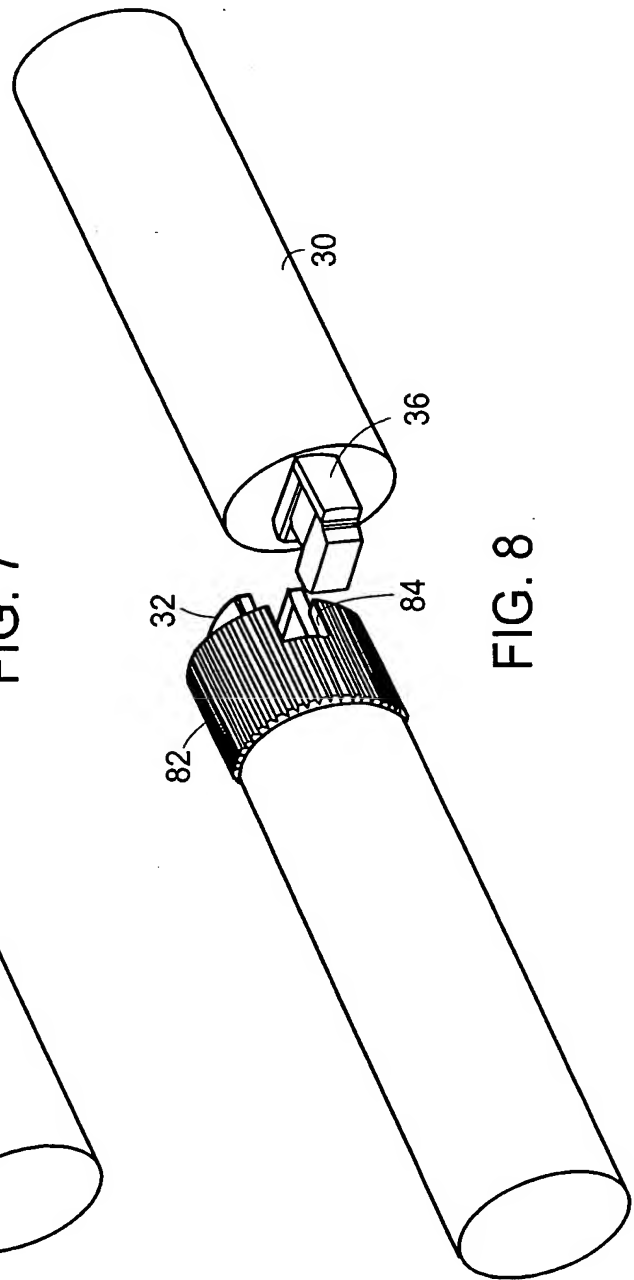


FIG. 8



6/6

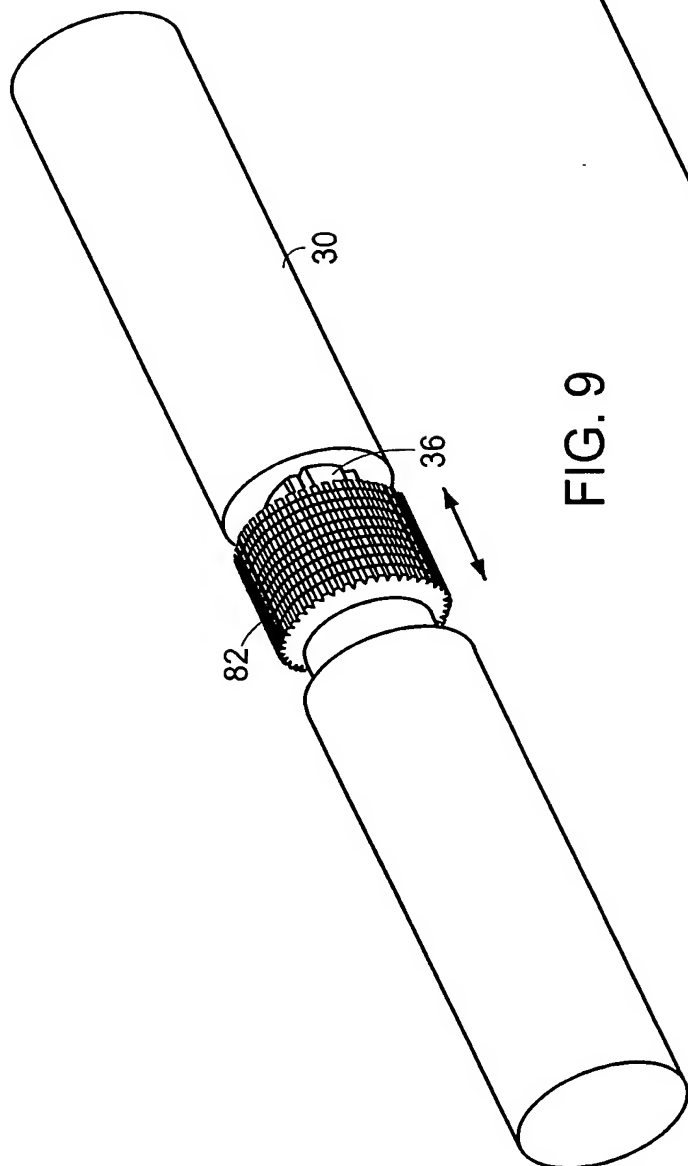


FIG. 9

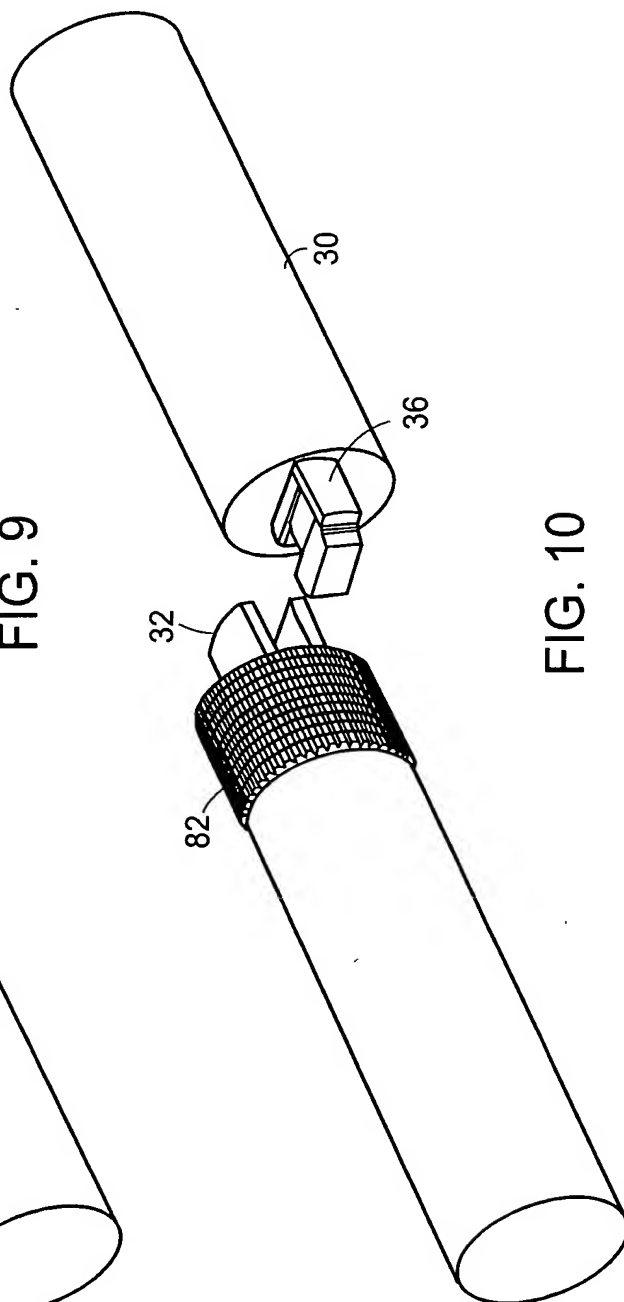


FIG. 10